




SEPARATOR CARTRIDGES

A range of separator cartridges for second stage filter water separation

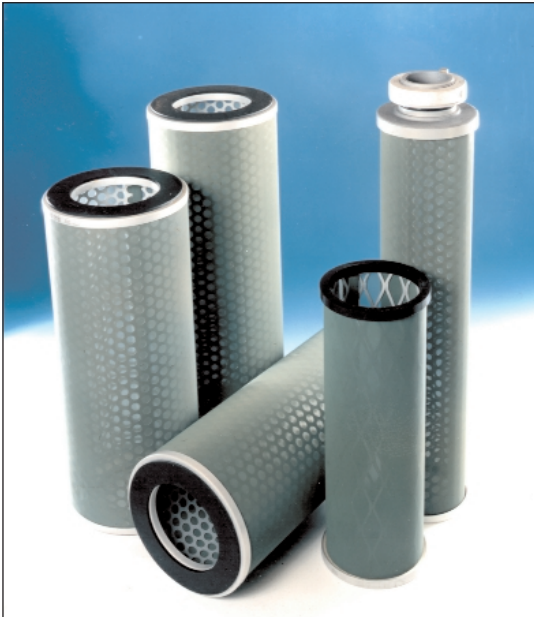

- **Second stage water removal**
- **TeflonTM coated screen**
- **Cleanable and re-usable**
- **Flow outside to in**
- **Maximum operating temperature of 115°C**

The function of the cartridges is to repel coalesced water drops produced by the first stage coalescer cartridges while permitting hydrocarbons to pass through the element.

Availability

Code	Diameter (mm)		Length Options Available (mm)										Seal Type	
	External	Internal	286	304	320	368	508	546	565	730	846	1099		
S4	100	Upon request		X			X							Flat
S109	109	89			X									Flat
S6	150	89	X		X	X			X	X	X	X	X	Flat

Materials

- Teflon coated stainless steel screen 200 or 100 mesh
- Anodised aluminium core
- BUNA-N gaskets
- Other gaskets and materials available if required



Cobham Fluid Systems Limited
 Holland Way, Blandford Forum, Dorset, England. DT11 7BJ
 Tel: 44 (0)1258 486600 Fax: 44 (0)1258 486601
 www.cobhamfluidsystems.com
 sales@cobhamfluidsystems.com

Copyright: Cobham Fluid Systems.
 This publication provides outline information only, which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

A Flight Refuelling company



A Collective Member of

