



## MINIATURE FLOAT SWITCH




- **Low cost**
- **All stainless steel construction**
- **Switch contact outputs**
- **Suitable for small tanks**
- **Options for mounting, switch configuration**
- **Float materials.**

Cobham miniature level switches have been developed for use on small tanks where space is at a premium, such as water, fuel or lubrication oil tanks. Up to 5 independent switching levels are possible with options for switch configurations.

### Technical Specification

Wet side material	-	316L Stainless Steel support tube
Float material	-	316 Stainless Steel or Divinicell
Switch rating	-	40 watts SPST
Switch configuration (SPST)	-	BOR, MOR, BOF or MOF
Termination options	-	450mm Flying leads as Std. die cast aluminium housing
Mounting options (M10 Thread)	-	Top, side or bottom
Rating	-	IP65
Temperature	-	-40°C to 140°C ST. steel float -20°C to 80°C polyprop float
Pressure	-	35 bar - Stainless Steel Float 28 bar - Divinicell float
Minimum S.G.	-	0.73 - Stainless Steel Float 0.58 - Divinicell float

# Outline Dimensional Drawing

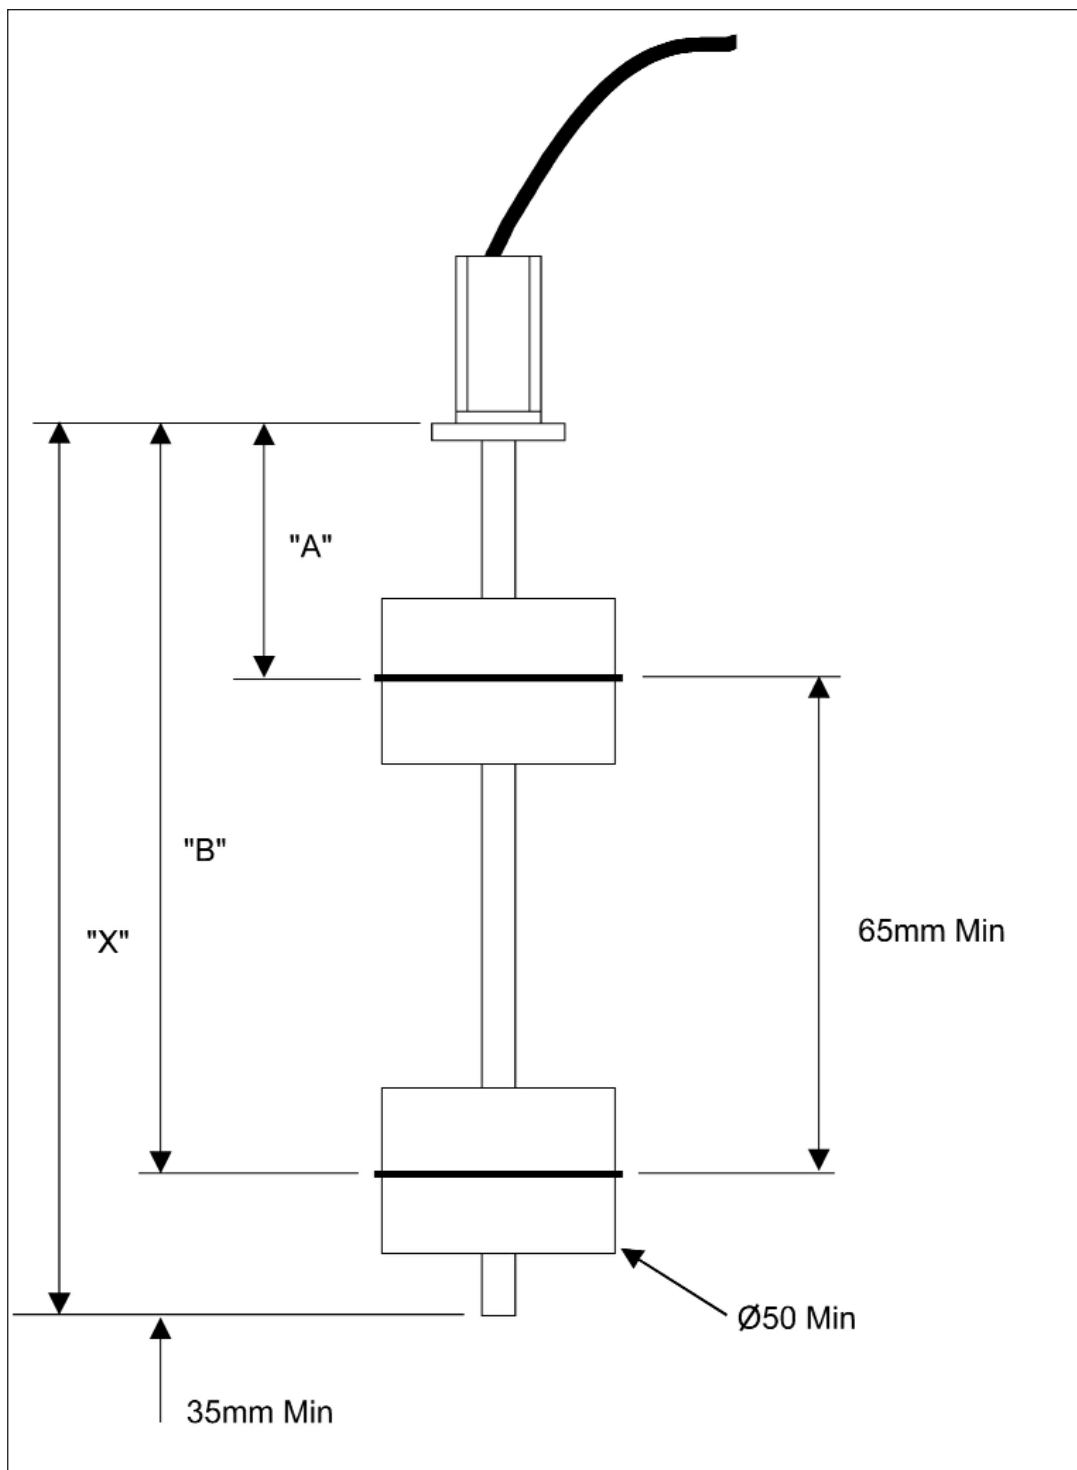

**Cobham Fluid Systems Limited**  
 Holland Way, Blandford Forum, Dorset, England. DT11 7BJ  
 Tel: 44 (0)1258 486600 Fax: 44 (0)1258 486601  
 www.cobhamfluidsystems.com  
 sales@cobhamfluidsystems.com

Copyright: Cobham Fluid Systems.  
 This publication provides outline information only, which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

*A Flight Refuelling company*



A Collective Member of  
**IP** THE INSTITUTE OF PETROLEUM